Innlights
Displaysolutions



POP-UP
TRAILER 5.5 × 3m
[Pixel Pitch 3.9 mm / 16.5 m²]

// PLUG & PLAY OUTDOOR
HIGH RESOLUTION LED-SCREEN


High-resolution outdoor LED screen trailer with < 15 minutes set-up and supereasy use.

/ Mobile plug & play LED-Screen with less than 15 minutes set-up
/ Screen size 5,50 × 3 m
/ Operation and status check worldwide via LTE connection
/ Integrated INNVISION video scaler
/ Brightness sensor
/ Wind sensor (screen operable up to 17.5 m/s)
/ Integrated DVBT/SAT

OPTIONAL:

/ CCTV (video monitoring)
/ Loudspeakers

5VB
SCREEN
FIRE CLASS

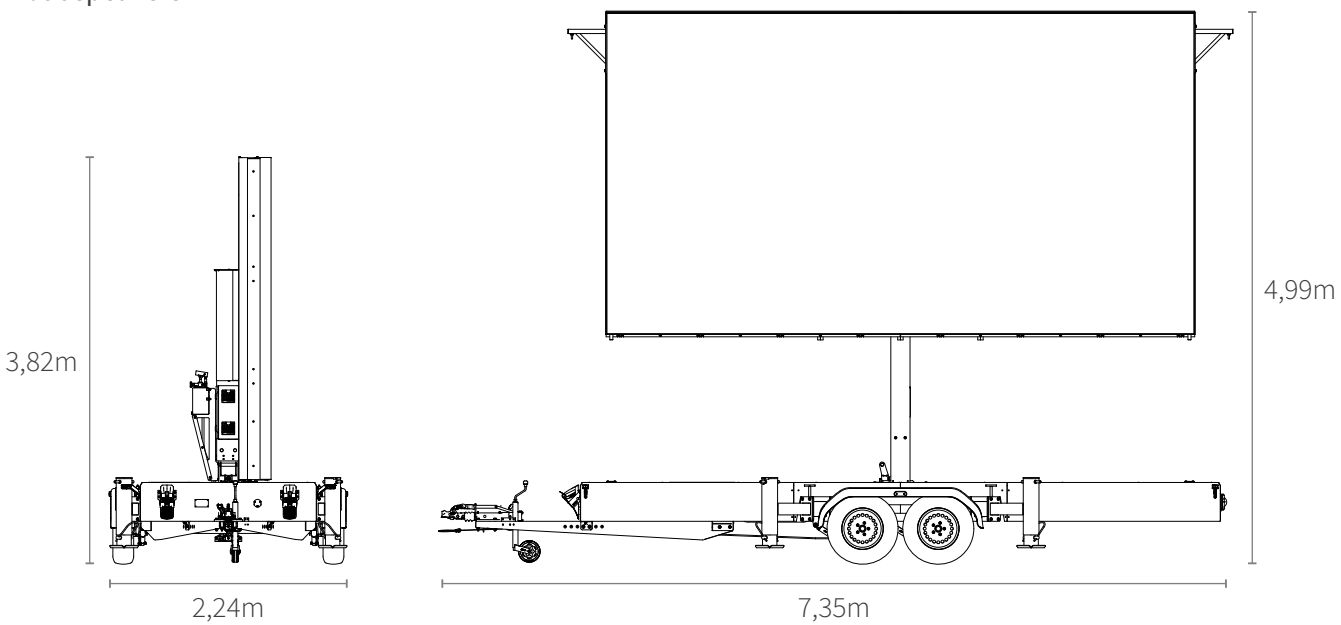

Innlights
Displaysolutions

POP-UP **TRAILER 5.5 × 3m** / InnScreen LM3.9

PHYSICAL SPECS	
Pixel Pitch [mm]	3,9
Brightness [cd/m²]	4.500
Protection Level [Front/Back]	IP 66
Screen Size [m]	5,50 × 3
Screen Size [px]	1408 × 768
Height [Top Edge / m]	4,99
Rotation angle [deg]	360
Vehicle dimensions [LxWxH /m]	7,36 × 2,20 × 3,85
Weight [Screen/ t]	0,54
Weight [Total/ t]	2,59

VISUAL SPECS	
Viewing Angle Hor/Ver [Deg]	160 / 120
Refresh Rate Min. [Hz]	3.840
LED	Nationstar [copper]
LED Type	SMD 1921 [black face]
Processing [bit]	15
Video Processing	InnVision K5+

POWER	
Connection	32A CEE red
Voltage [V]	110 - 220
Power Cons. Max./Avg. [W/m²]	600 / 180

INNLIGHTS STANDARDS
WEEE-Reg.-No.: DE 55860379
Certificates: TUV CE, EMC CE (EMV)


ENVIRONMENT	
Operating Humidity [RH]	95%
Operating Temp. Min./Max. [°C]	-20 / +60

PLAYBACK
PC / Mobile

CLOUD REMOTE
Global LTE Monitoring & Control

PORTS
HDMI / SDI



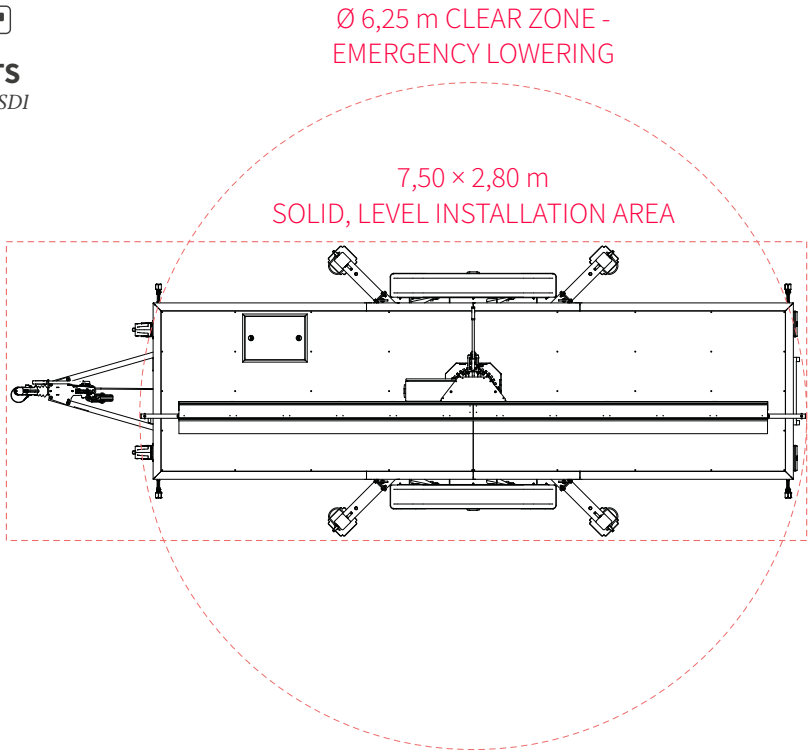

All data without warranty.